


**WIRE
FREE**



IN THE BOX

One Lite headphones
One WTX Transmitter
Two USB 2.0 charger cables
One USB to 6.35|1/4" audio cable
Two elastic bands, two velcro pads, one soft carry case

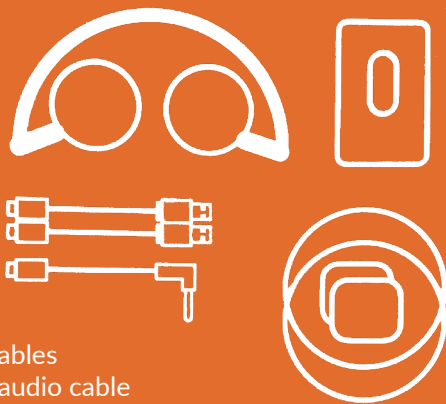

EU Declaration of Conformity

Hereby, Dongguan Quest Detection Technology Co., Limited declares that this radio equipment is in compliance with directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following address:
www.detectorportal.eu/compliance

WIREFREE LITE MANUAL



Congratulations on your purchase of this Wire-Free headphone kit. Before using your headphones for the first time, please take a moment to carefully read the following information.

IMPORTANT - PLEASE READ

Fully recharge the batteries before using.

Do not expose the devices under direct sunshine.

Do not immerse the devices in any liquid.

SERVICE EUROPE

Quest Europe GmbH

Bunde-West 15 - 26831 Bunde - Germany -
info@idc-detektor.de - +49 (0)49537082810

SAFETY INSTRUCTIONS

- When wearing the headphones, make sure the volume is turned to minimum. Only adjust the volume after putting the headphones on. Do not turn the volume up too loud. You could cause permanent damage to your hearing.
- Danger to life! Headphones dramatically reduce your ability to hear ambient noise. Using headphones while in road traffic is potentially very dangerous and is therefore prohibited by law. Also, please make sure that you do not use your headphones when in the vicinity of possibly dangerous machines and tools.
- This product's wireless 2.4G technology has a transmission range of approx. 10 meters, but interfering obstacles (people, metal objects, walls, etc.), other radio signals, and other factors may affect the transmission range or even lead to the loss of the connection.

1.1 HEADPHONE ADJUSTMENT

Before wearing the Wire-Free lite headphone for the first time, you should adjust it properly to achieve the best sound and ambient noise attenuation.



Unfold the headphone pad as the figure 1. and 2. Select the appropriate lock-in position on both sides of the headband as in figure 3. The pads will adjust the angle automatically according to your head size.

1.5 TRANSMITTER ATTACHMENT

We provide two methods to attach the transmitter to your detector. For headphone jack on control box, you can clip it on the rod by elastic band. For headphone jack under the arm-rest, you can paste the Velcro pad to attach on the detectors surface.



1.6 VOLUME CONTROL

If the detector's audio is too loud or low, you can also adjust the headphone volume by pressing the volume buttons.

1.2 POWER ON TRANSMITTER

Make sure the transmitter is fully charged and press the power button for 1 second. The LED indicator will start to flash. The battery condition LED will indicate the battery life for 3 seconds.

1.3 POWER ON HEADPHONES


MAke sure the headphones are fully charged and press the power button (between the volume buttons) for 1 second. The LED indicator will start to flash.

1.4 PAIRING (if necessary)

Each set of Wire-Free have been pre-paired before packing. If you need to pair them again, please place the headphone within 10 cm of the transmitter and press and release the power button of the headphones quickly. The LED indicator will change to steady condition.

2.1 TRANSMITTER RECHARGING

You can recharge it with a smartphone charger (recommended), laptop or computer USB port or with a power bank. Plug the USB side into the port and insert the microUSB head on the transmitters's charging port. The battery LED indicator will start to flash. All the green LED will light up when fully charged.

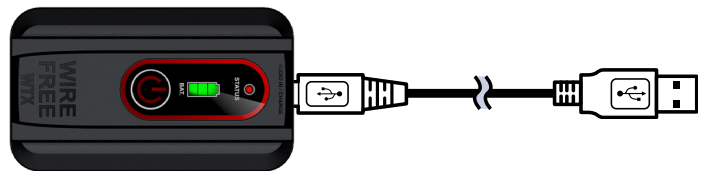

2.2 HEADPHONE RECHARGING

You can also charge the headphones through the USB 2.0 cable with a computer, smartphone wall charger (recommended) or portable power bank. The green light will turn off when fully charged. Recharging takes about 2 to 3 hours.